

2000nm Single-Mode Fused Coupler



Key Features

- Low Insertion Loss
- Low Polarization Dependent Loss
- All Split Ratios Available
- High stability & Reliability

DK Photonics single-mode fused coupler are used to split off a portion of light to allow for optical monitoring and feedback. These devices are used extensively in fiber amplifier power control, and in transmission equipment for performance monitoring and feedback control. Our ultra-low polarization dependent loss couplers offer low levels of sensitivity to polarization, enable more effective monitoring and management of optical networks. These couplers are available in a wide range of split ratios, lengths, and packaging. Custom terminations are also available.

Applications

- Fiber Laser
- Fiber amplifier
- Testing Instrumentations

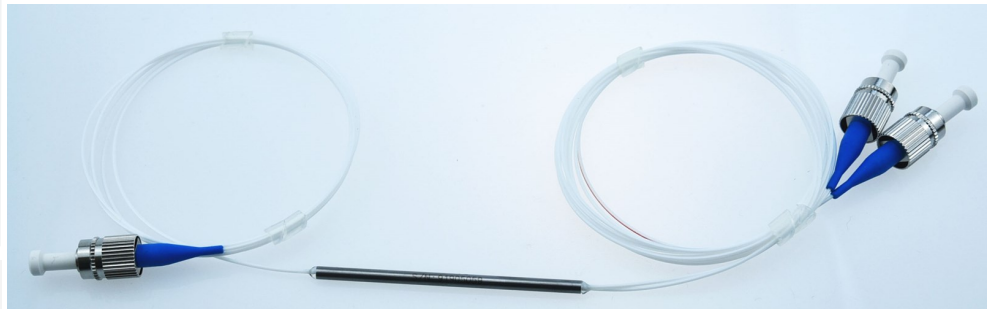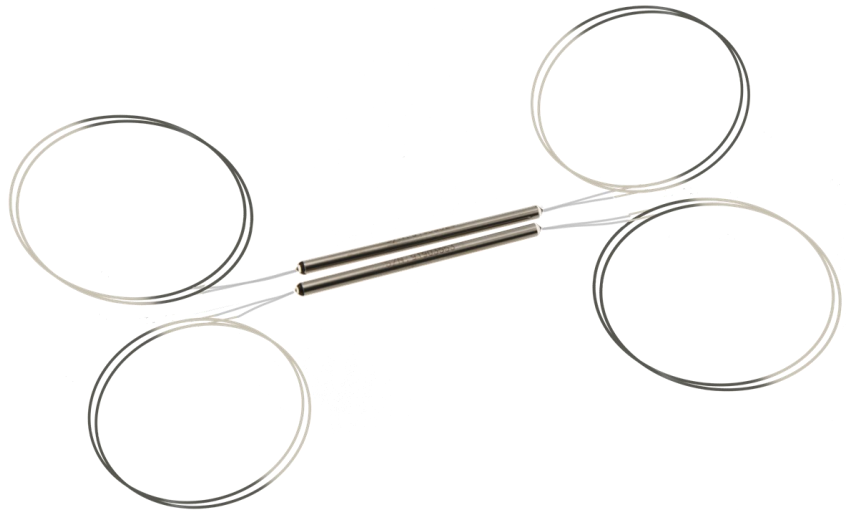

For more Info

Please contact us at:

Tel: +86-755-23736280

Fax: +86-755-26746512

E-mail: sales@dkphotonics.com

<https://www.dkphotonics.com>


Add.:

4F, Bldg. 18, Qinghu Industrial Park,

Dahe Road, Longhua Dis.,

Shenzhen, China 518109

Package Dimension

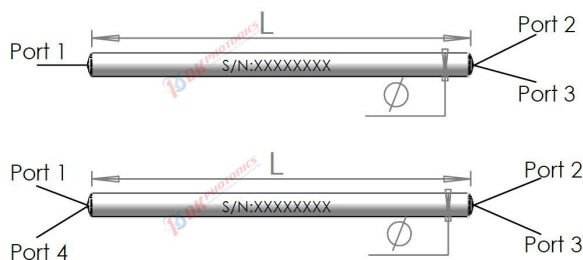

*Due to ongoing design improvements, the package size is subject to change. Please contact DK Photonics for confirmation if you have special requirements.



2000nm Single-Mode Fused Coupler

Performance Specifications

Parameter	Unit	Values		
Grade	-	P		
Operating wavelength	nm	1900,1950,2000,2050, others on request		
Operating bandwidth	nm	± 15		
Typical excess loss	50/50	dB	≤3.6	
	45/55	dB	≤4.3/3.3	
	40/60	dB	≤4.7/2.8	
	35/65	dB	≤5.5/2.5	
	33/67	dB	≤5.7/2.3	
	30/70	dB	≤6.0/2.0	
	25/75	dB	≤7.0/1.8	
	Insertion loss @ Coupling Ratio (%)	20/80	dB	≤8.0/1.35
		15/85	dB	≤9.6/1.2
		10/90	dB	9.00~11.20/≤0.8
5/95		dB	11.75~14.45/≤0.5	
3/97		dB	13.75~16.85/≤0.4	
PDL	2/98	dB	15.35~18.85/≤0.35	
	1/99	dB	18.15~22.00/≤0.3	
		dB	≤0.15	
Return Loss	dB	≥50		
Directivity	dB	≥55		
Max. Optical Power (CW)	W	0.5,2,5,10		
Fiber Type	-	SMF-28e, SM1950 or other		
Operating Temperature	°C	-20~+75		
Storage Temperature	°C	-40~+85		
Package Dimension	mm	Φ3x54(bare fiber), Φ3x60(0.9mm loose tube)		

1. Above specifications are for device without connector.

2. For devices with connectors, IL will be 0.3dB higher, RL will be 5dB lower. Powers transmit through the connector less than 2W.

Order information P/N: FBTC-①-②-③-④-⑤-⑥-⑦-⑧-⑨

When you inquire, please provide the correct P/N number according to our ordering information, and attach the appropriate description would be better. If need any connector, we do not recommend choosing a 250μm bare fiber pigtail.

①	②	③	④	⑤	⑥	⑦	⑧	⑨
Grade	Port	Wavelength	Power Handling	Coupling Ratio(%)	Fiber Type	Pigtails Diameter	Fiber Length	Connector
P: P Grade	102:1x2	1900:1900nm	L:<0.5W	50:50/50	S28: SMF-	25:250μm	05:0.5m	00: None
A:A Grade	202:2x2	1950:1950nm	2:2W	40:40/60	28e	90:900μm	10:1.0m	FP: FC/PC
		2000:2000nm	5:5W	30:30/70	S19:SM1950	XX: Others	15:1.5m	FA: FC/APC
		2050:2050nm	10:10W	20:20/80	X: Others		XX: Others	SP: SC/PC
		XX: Others	20:20W	10:10/90				LP: LC/PC
				05:5/95				LA: LC/APC
				02:2/98				XX: Others
				01:1/99				
				XX: Others				

Part Number Example: FBTC-P-102-1950-L-50-S19-90-10-FA

Description: 1X2 Single Mode Standard Coupler, 1950nm, P grade, 1x2, 0.5w handling power, 50:50, SM1950 fiber, with 0.9mm OD loose tube, 1.0m length fiber pigtails, FC/APC connectors at all ports.

Ordering Information for Custom Parts

If you need to customize other specifications, please provide detailed description for your requirement.