

200GHz DWDM Mux/Demux Packed in ABS Box

Key Features

- 200GHz ITU channel spacing
- Low insertion loss
- High channel isolation
- Excellent environmental reliability
- Scalability to grow fiber capacity with little or no increased cost
- Protocol Transparent
- Simple to install and use

200GHz dense wavelength division multiplexer (DWDM) utilizes thin film coating technology and proprietary design of non-flux metal bonding micro optics packaging to achieve optical add and drop at the ITU wavelengths. It provides ITU channel center wavelength, low insertion loss, high channel isolation, wide pass band, low temperature sensitivity and epoxy free optical path. It can be used for wavelength add/drop in telecommunication network system.

Our DWDM Mux/Demux products provide up to 24-channel Multiplexing on a single fiber. Standard DWDM Mux/Demux package type include: ABS box package, LGX package and 19" 1U rack-mount.

Our DWDM products are Telcordia qualification tested.

Applications

- Channel add / drop
- DWDM network
- Wavelength routing
- Fiber optical amplifier
- Metro-Core, Metro-Access and Enterprise Networks
- Enterprises with Fiber Infrastructure
- Networks requiring ATM, Escon, Fibre Channel & Gigabit Ethernet Simultaneously
- Mirroring/Replicating data to Disaster Recovery Sites



For more Info

Please contact us at:

Tel: +86-755-23736280

Fax: +86-755-26746512


E-mail: sales@dkphotonics.com

<https://www.dkphotonics.com>

Add.:

4F, Bldg. 18, Qinghu Industrial Park,
Dahe Road, Longhua Dis.,
Shenzhen, China 518109

Package Dimension:

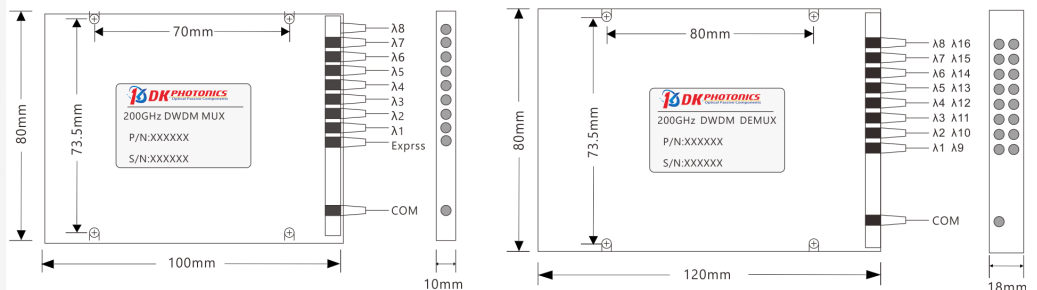

*Due to ongoing design improvements, the package size is subject to change. Please contact DK Photonics for confirmation if you have special requirements.



200GHz DWDM Mux/Demux Packed in ABS Box

Performance Specifications

Parameter	Unit	Values					
		4 channels		8 channels		16 channels	
Channel Configuration	-	MUX	DEMUX	MUX	DEMUX	MUX	DEMUX
Channel Wavelength	nm	ITU 200 GHz Grid					
Center Wavelength Accuracy	nm	± 0.1					
Channel Spacing	GHz	200					
Channel Passband (@-0.5dB bandwidth)	nm	0.5					
Insertion Loss	dB	≤1.7		≤3.0		≤3.8	
Channel Uniformity	dB	≤0.6		≤1.0		≤1.5	
Channel Ripple	dB	≤0.3		≤0.3		≤0.3	
Isolation @Add/Drop Channel	dB	N/A	>30	N/A	>30	N/A	>30
	dB	N/A	>40	N/A	>40	N/A	>40
Insertion Loss Temperature Sensitivity	dB/°C	≤0.005					
Wavelength Temperature Shifting	nm/°C	≤0.002					
Polarization Dependent Loss	dB	≤0.1		≤0.1		≤0.15	
Polarization Mode Dispersion	ps	≤0.1					
Directivity	dB	>50					
Return Loss	dB	>45					
Maximum Power Handling	mW	500					
Operating Temperature	°C	-5 ~+75					
Storage Temperature	°C	-40 ~+85					
Package Dimension	mm	L100 x W80 x H10.5		L100xW80xH10 L120xW80xH18 (Mux&Demux)		L120xW80xH18 L140 x W115x H18 (Mux&Demux)	

1. The above specification is without connector.
2. IL is 0.3 dB higher and RL is 5 dB lower for each connector and adapter added.
3. Channel count is from low to high for mux and high to low for demux if mux & demux are packaged in one cassette.
4. Other specifications can be made on customer request.

Order information P/N: DWDM-20-①-②-③-④-⑤-⑥-⑦

When you inquire, please provide the correct P/N number according to our ordering information, and attach the appropriate description would be better. If need any connector, we do not recommend choosing a 250µm bare fiber pigtail.

20	①	②	③	④	⑤	⑥	⑦
Spacing	Channel	Configuration	1st Channel	Express Port	Pigtails Diameter	Fiber Length	Connector
20:100GHz	4:4 Channel 8:8 Channel 16:16 Channel	M:Mux D:DeMux O:Mux&Demux	C21:1560.61nm C23:1558.98nm C25:1557.36nm	0:No Express 1: W/Express	25:250µm 90:900µm 20:2.0mm 30: 3.0mm XX: Others	05:0.5m 10:1.0m 15:1.5m XX:Others	00:None FP: FC/PC FA: FC/APC SP: SC/PC SA: SC/APC LP: LC/PC LA: LC/APC XX: Others

Part Number Example: DWDM-20-4-M-C21-0-90-10- LP

Description: 200GHz 4 Channel DWDM Mux Module Packed in ABS Box, C21~C27, no express, with 0.9mm OD loose tube, 1.0m length fiber pigtails, LC/PC connectors at all ports.

Ordering Information for Custom Parts

If you need to customize other specifications, please provide detailed description for your requirement.