

1x2(2x2) 650nm PM fiber Fused Coupler

Key Features



- Wavelength 400 - 750 nm Available
- Coupling Ratio from 1/99 to 50/50 Available
- Low Excess Loss
- High Stability and Reliability
- Special Wavelengths WDM also Available

DK Photonics uses unique fusing technique to build the 400~750nm PM fiber fused coupler. The coupling ratio could be selected according to customer's request. It features low excess loss, small size and high polarization extinction ratio.

If you do not see a standard PM Fused Coupler that meets your needs, we welcome the opportunity to review your desired specification and quote a custom PM fused Coupler. Requests for custom fiber pigtailed, different wavelengths, tap Ratio and handling power of operation or other specific needs will be readily addressed.

Applications

- Fiber Optic Instruments
- Fiber Amplifiers
- Power Monitoring
- Fixed Attenuation
- Testing Instruments

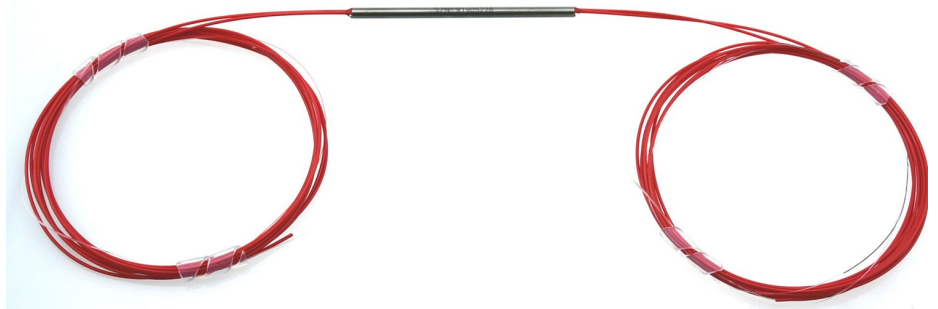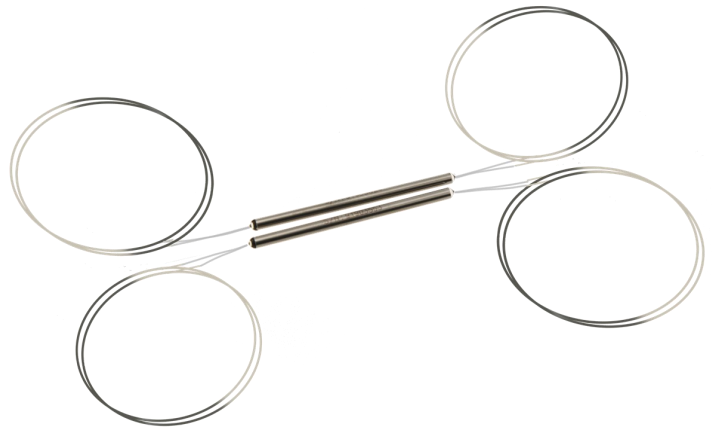

For more Info

Please contact us at:

Tel: +86-755-23736280

Fax: +86-755-26746512

E-mail: sales@dkphotonics.com

<https://www.dkphotonics.com>


Add.:

4F, Bldg. 18, Qinghu Industrial Park,


Dahe Road, Longhua Dis.,

Shenzhen, China 518109

Package Dimension

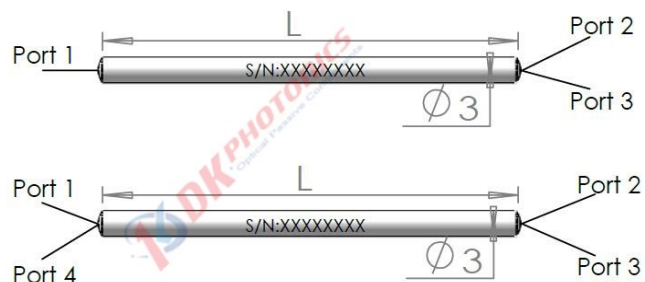

*Due to ongoing design improvements, the package size is subject to change. Please contact DK Photonics for confirmation if you have special requirements.



1x2(2x2) 650nm PM fiber Fused Coupler

Performance Specifications

Parameter	Unit	Values
Configuration	-	1x2 or 2x2
Center Wavelength	nm	650
Wavelength Range	nm	±10
Coupling Ratio	%	1~50
Typ. Excess Loss	dB	0.6
Min. PER	dB	18
Min. Return Loss	dB	55
Max. Power Handling	mW	100 mW (With Connectors or Bare Fiber), 250 mW (Spliced)
Max. Tensile Load	N	5
Fiber Type	-	PM630-HP
Operating Temperature	°C	-10 ~ +75
Storage Temperature	°C	-40 ~ +85
Dimensions (Φ×L)	mm	Φ3.0×54, or Φ3.0×60

1. Above specifications are for device without connector, and the PM fused coupler is both axis working, no axis can be blocked; default test extinction ratio is on the slow axis. All parameters are tested at room temperature at central wavelength only.

2. ER data listed in the table are for the ports with coupling ratio greater than 10%. It will be 2 dB lower for a tap port with coupling ratio between 5-10%. For <5% tap port, ER is not considered if there is no requirement.

3. For devices with connectors, IL will be 1.0dB higher, RL will be 5dB lower and ER will be 2dB lower. The default connector key is aligned to slow axis.

Order information P/N: PMFBTC-①-②-③-④-⑤-⑥-⑦

When you inquire, please provide the correct P/N number according to our ordering information and attach the appropriate description would be better. If need any connector, we do not recommend choosing a 250μm bare fiber pigtail.

①	②	③	④	⑤	⑥	⑦	
Port	Operating Wavelength	Coupling Ratio		Fiber type	Pigtail Diameter	Fiber Length	Connector
102:1x2	650:650nm	50:50/50	05:5/95	P63:	25:250μm bare fiber	08:0.8m	00: None
202:2x2	XX: Others	40:40/60	01:1/99	PM630-HP	90:900μm Loose tube	10:1.0m	FP: FC/PC
		20:20/80	XX: Others	XXX: fiber name	XX: Others	XX: Others	FA: FC/APC
		10:10/90					XX: Others

Part Number Example: PMFBTC-102-650-50-P63-25-10-00

Description: 650nm 1x2 PM Fiber Fused Coupler, 50:50 coupling ratio, 1.0m PM630-HP bare fiber, and no connector at all ports.

Ordering Information for Custom Parts

If you need to customize other specifications, please provide detailed description for your requirement.