




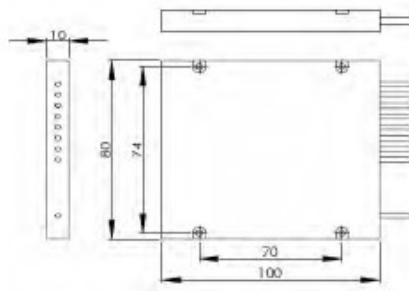

Singlemode Tree and Star Couplers

DK Photonics' 1×N and M×N coupler modules are cascaded with the single mode couplers. These modules are widely used for FTTH, LAN, and CATV optical networks.

The products are Telcordia GR-1221/1209-CORE qualified, and RoHS compliant.

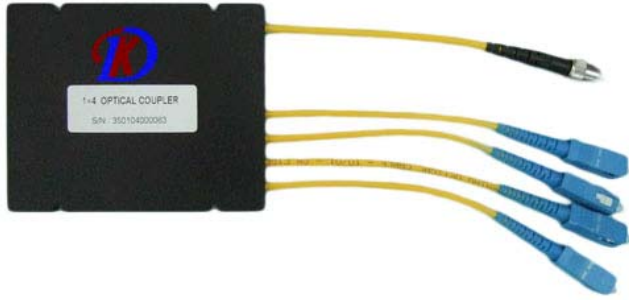

Features

- ◆ Low excess loss
- ◆ Uniform power splitting
- ◆ Rugged package
- ◆ Excellent environmental & mechanical stability

Applications

- ◆ Long-haul telecommunications
- ◆ Digital, hybrid and AM-Video systems
- ◆ CATV systems
- ◆ High speed local area networks

Performance Specifications

Parameter	Specification
Directivity (dB)	> 55
Operating Temperature (°C)	-20 ~ +70(-40 ~ +85 available upon request)
Storage Temperature (°C)	-40 ~ +85
Fiber Type	Corning singlemode SMF-28, DS fiber or flex-core
Fiber Pigtail Length (m)	1m or custom on request
Port Configuration	1x4 to 32x32

Singlemode Standard Tree/Star Couplers

Configuration Type	1x 4(4x4)	1x8 (8x8)	1x16 (16x16)	1x32 (32x32)
Maximum insertion loss (dB)	6.8	10.2	13.6	17.5
Uniformity (Max.) (dB)	0.7	1.0	1.2	1.4
Polarization Dependant Loss (Max.) (dB)	0.15	0.20	0.25	0.30
Operating Wavelength (nm)	850, 980, 1310, 1550, 1585, or custom wavelength			
Package Dimension	D	D	E	E



Singlemode Single Window Wideband Tree/Star Couplers				
Configuration Type	1x4 (4x4)	1x8 (8x8)	1x16 (16x16)	1x32 (32x32)
Maximum Insertion loss (dB)	6.8	10.2	13.6	17.5
Uniformity (Max.) (dB)	0.8	1.2	1.6	2.0
Polarization Dependant Loss (Max.) (dB)	0.15	0.20	0.25	0.30
Operating Wavelength (nm)	1310 \pm 40, 1550 \pm 40, 1585 \pm 40, or custom wavelength			
Package Dimension	D	D	E	E

Singlemode Dual Window Tree/Star Couplers				
Configuration Type	1x4 (4x4)	1x8 (8x8)	1x16 (16x16)	1x32 (32x32)
Maximum Insertion Loss (dB)	7.6 (7.2)**	11.5 (10.8)**	15.5 (14.5)**	19.5 (18.5)**
Uniformity (Max.) (dB)	1.6 (1.4)**	2.5 (2.1)**	3.4(2.8)**	4.1 (3.5)**
Polarization Dependant Loss (Max.) (dB)	0.15	0.20	0.30	0.50
Operating Wavelength (nm)	1310/1530 \pm 40, (**1310/1550 \pm 20), or custom wavelength			
Package Dimension	D	D	E	E

* The Spec is for 1xN Coupler only.

Note: All values referenced are without connector.

Other specifications can be made on customer request.

Package Information

Package Type	D	E
Fiber Diameter	900 μ m/2mm/3mm loose tube	900 μ m/2mm/3mm loose tube
Dimensions (mm)	100 \times 80 \times 10.5	120 \times 80 \times 18

Order information

FBT-X-①-②②-③③-④④④④-⑤-⑥-⑦⑦-⑧⑧-⑨⑨

X	①	②②	③③	④④④④	⑤	⑥	⑦⑦	⑧⑧	⑨⑨
Type	Grade	Wavelength	Coupling Ratio (dB)	Port	Package	Fiber Type	Fiber Diameter	Fiber Length	Connector
S:S SC W:W BC D:D WC	P: P Grade A:A Grade	13:1310nm 15:550nm 16:1585nm 35:1310/15 50nm 36:1310/15 85nm	AV:Tree Coupler XX: Others	0103:1x3 0303:3x3 0104:1x4 0116:1x16 1616:16x16	D:Packag e D E:Packag e E	0:SMF-28 X:Others	90:900 um 20:2.0 mm 30:3.0 mm XX: Others	05:0.5m 10:1.0m 15:1.5m XX:Othe rs	00:None FP: FC/PC FA: FC/APC SP: SC/PC SA: SC/APC LP: LC/PC LA: LC/APC ST: ST/PC XX: Others