



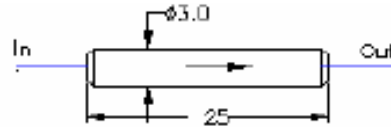

### Mini Size 1310&1550nm Polarization Isensitive Isolator

Optical isolators can block back lection and backscattering in the reverse direction at any polarization sate. They have low polarization mode dispersion (PMD). The optical path is epoxy-free, thereby enabling high-power applications. They are based on the micro-optics package technology and featured with the best stability and reliability. The products are Telcordia GR-1221-CORE qualified.

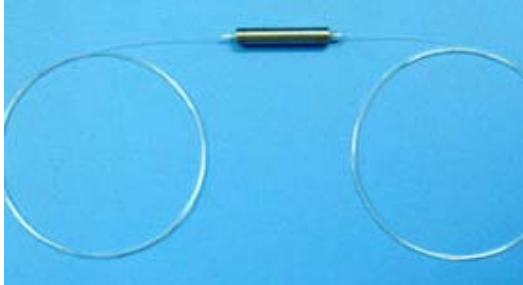

#### Features

- ◆ Low insertion loss
- ◆ High isolation
- ◆ Optical path epoxy free
- ◆ Low PDL & PMD

#### Applications

- ◆ DWDM/CWDM
- ◆ EDFA
- ◆ Raman Amplifiers
- ◆ Fiber Lasers

#### Performance Specifications

Parameter	Single Stage		Dual Stage	
	P	A	P	A
Grade	P	A	P	A
Operating Wavelength (nm)	1310 or 1550			
Typical Peak Value Isolation (dB) (23°C)	>40	>38	>50	>48
Minimum Value Isolation * (dB) (23°C)	>28	>26	>42	>40
Insertion Loss Typical Value ** (dB)	0.4	0.5	0.5	0.6
Insertion Loss Maximum value *** (dB)	<0.6	<0.7	<0.7	<0.8
Return Loss (In/Out) (dB)	>55/50	>55/50	>55/50	>55/50
PDL (dB)	< 0.05	< 0.1	< 0.05	< 0.1
PMD (dB)	0.2(0.05 available upon request)			
Band Width (nm)	±15		±30	
Operating Temperature (°C)	-20 ~ + 70			
Storage Temperature (°C)	-40 ~ +85			
Fiber Type	Corning SMF-28			
Fiber Length	1m			
Dimensions(mm)	Φ3.0x22 orΦ3.0x25			
Power Handling (mw)	300			

\*At 23° C over bandwidth.

\*\* Does not include connector, splice and fiber-end fresher losses.

#### Order information

ISO-①①-②②-③-④-⑤⑤-⑥⑥-⑦⑦

①①	②②	③	④	⑤⑤	⑥⑥	⑦⑦
Type	wavelength	Grade	Package spec	Fiber Diameter	Fiber Length	Connector
IS:Single stage IU: Dual stage	13:1310nm 14:1480nm 15:1550nm LB:L band	P:P Grade A:A Grade	1: Φ3.0x22mm 2: Φ3.0x25mm	25:250um 90:900um XX: Others	05:0.5m 10:1.0m 15:1.5m XX:Others	00:None FP: FC/PC FA: FC/APC SP: SC/PC SA: SC/APC LP: LC/PC LA: LC/APC XX: Others