



1030/980nm High Power WDM & Tap & TGG Isolator Hybrid Combination (HPWTIH, 1μm fiber laser, 20W)

Key Features

- Compact Size
- Low insertion loss
- High channel Isolation
- High stability and reliability
- Epoxy free on optical path


DK Photonics' WDM/Tap Coupler/Isolator Hybrid Combination is a combination of a wavelength division multiplexer, tap coupler and an isolator in a compact package. All input and output fibers are polarization maintaining. This product has an extremely low insertion loss, a very stable tap-coupling ratio, high isolation, and high return loss. This product offers integrated solution to Fiber laser and Fiber amplifier application by combining more functions into a very compact package.

Applications

- Fiber laser
- Fiber amplifier
- Fiber Sensor
- Communications
- Laboratory R&D



Package Dimension:

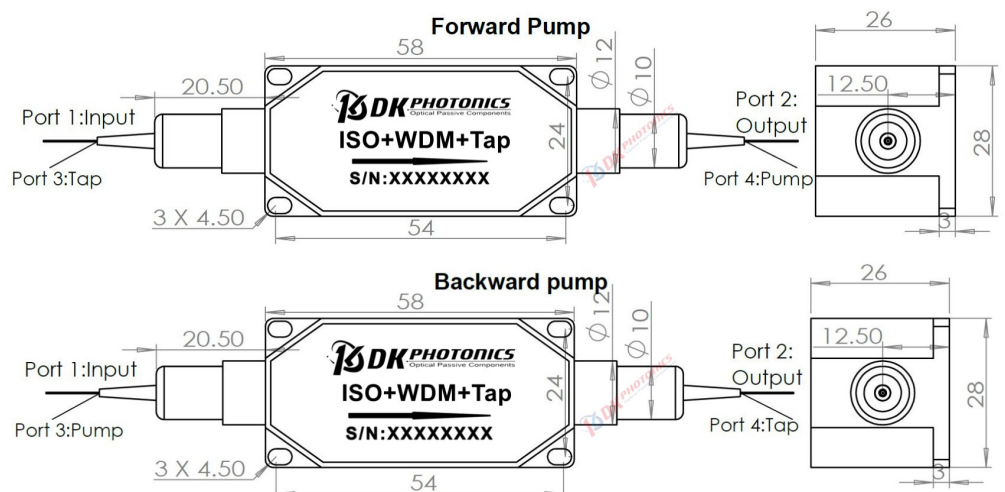

*Due to ongoing design improvements, the package size is subject to change. Please contact DK Photonics for confirmation if you have special requirements.

For more Info

Please contact us at:

Tel: +86-755-23736280

Fax: +86-755-26746512

E-mail: sales@dkphotonics.com

<https://www.dkphotonics.com>

Add.:

4F, Bldg. 18, Qinghu Industrial Park,
Dahe Road, Longhua Dis.,

Shenzhen, China 518109

1030/980nm High Power WDM & Tap & TGG Isolator Hybrid Combination (HPWTIH, 1μm fiber laser, 20W)

Performance Specifications

Parameter	Unit	Values
Signal Central Wavelength (λ_c)	nm	1030, 1040, 1064
Signal Wavelength Range	nm	$\lambda \pm 10$
Max. Signal Excess Loss, λ_c , @ 23°C	nm	1.2
Min. Signal Isolation, λ_c , @ 23°C (Isolator)	nm	26
Min. Isolation (WDM)	Signal Channel	dB
	Pump Channel	dB
Signal Tap Ratio	%	1~50
Pump Wavelength Range	nm	960~990
Max. Insertion Loss (Pump to Common)	dB	0.7
Max. PDL (SM fiber)	dB	0.15
Min. Return Loss	dB	50
Max. Power Handling (CW)	W	2, 5, 10, 20
Max. Peak Power for Pulse	kW	1, 5, 10
Max. Tensile Load	N	5
Fiber Type	-	1060-XP or 10/125 SC fiber or specified
Operating Temperature	°C	-5 to +70
Storage Temperature	°C	-40 to +85

- Above specifications are for device without connector.
- For devices with connectors, IL will be 0.3dB higher, RL will be 5dB lower. Power transmits through the connector less than 2W.
- If there is pulse application, please be sure to inform us of pulse energy and peak power.

Order information P/N: HPWTIH -①-②-③-④-⑤-⑥-⑦

When you inquire, please provide the correct P/N number according to our ordering information and attach the appropriate description would be better. If need any connector, we do not recommend choosing a 250μm bare fiber pigtail.

①	②	③	④	⑤	⑥	⑦
Wavelength	Optical Power	Tap Ratio	Pump Configuration	Pigtail Diameter	Fiber Length	Connector
69:1064 signal/980 pump	L:<0.5W	01:1% Tap	F: Forward Pump	25:250μm bare fiber	05:0.5m	00:None
39:1030 signal/980 pump	1:1W	02:2% Tap		90:900μm Loose Fiber	10:1.0m	FP: FC/PC
49:1040 signal/980 pump	3:3W	05:5% Tap		XX: Others	15:1.5m	FA: FC/APC
	5:5W				XX: Others	XX: Others
	10:10W					
	20:20W					

Part Number Example: HPWTIH-39-5-01-F-25-10-00

Description: HP WDM/Tap Coupler/Isolator Hybrid Combination ,5W handling power, <10kW peak power, forward pump, 1030nm signal/980nm pump, 1% tap, 1060-XP fiber for all port, bare fiber, 1.0m fiber length, and no connector.

Ordering Information for Custom Parts

If you need to customize other specifications, please provide detailed description for your requirement.