



## 1030nm 1x2(2x2) PM Fiber Fused Coupler

### Key Features

- Low Insertion Loss
- High Extinction Ratio
- Compact In-Line Package
- Operating on both Fast and Slow Axis
- High Stability and Reliability


DK Photonics uses unique fusing technique and polarization maintaining fiber to build the polarization maintaining fused coupler (PMC). The coupling ratio could be selected according to customer's request. It features low excess loss, small size and high polarization extinction ratio. PMC is widely used for optical sensors and optical gyro.

The 1x2(2x2) Polarization Insensitive Fused PM Fiber Standard Coupler can be used to split high power linearly polarized light into two paths without perturbing the line are state of polarization (SOP). It can be operating on both Fast and Slow Axis.

If you do not see a standard PM Fused Coupler that meets your needs, we welcome the opportunity to review your desired specification and quote a custom PM fused Coupler. Requests for custom fiber pigtailed, different wavelengths, tap Ratio and handling power of operation or other specific needs will be readily addressed.

### Applications

- Fiber Optic Instruments
- Fiber Amplifiers
- Fiber Sensors
- Coherent Detecting
- Research

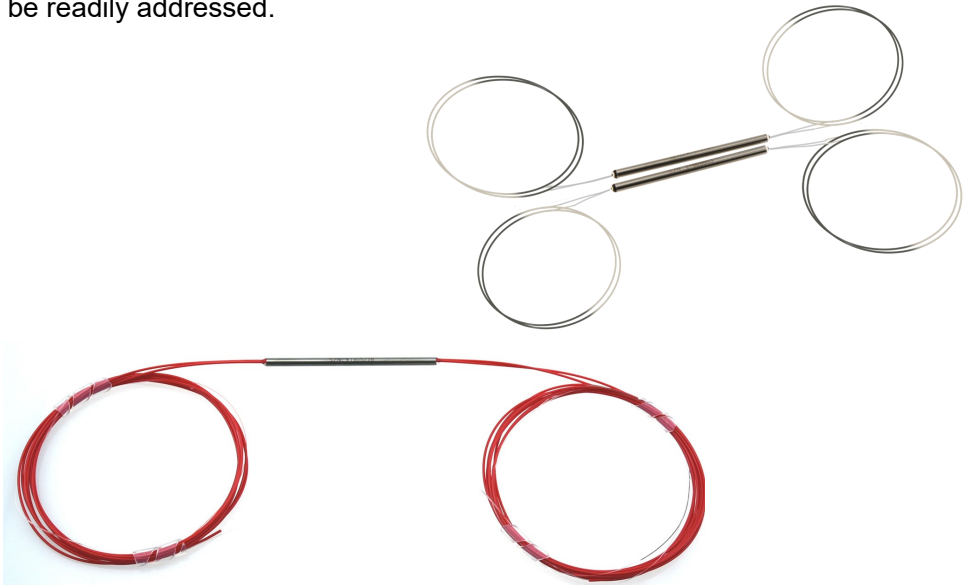

### Max. Coupling Ratio Tolerance(780~2100nm), @λc:

Coupling Ratio	1/99	2/98	5/95	10/90	20/80	30/70	40/60	50/50
Tolerance for P grade (%)	±0.4	±0.6	±0.8	±1.2	±2.0	±2.5	±2.5	±3.5
Tolerance for A grade (%)	±0.6	±0.8	±1.0	±2.0	±2.5	±3.5	±3.5	±5.0

## For more Info

### Please contact us at:

Tel: +86-755-23736280

Fax: +86-755-26746512


E-mail: [sales@dkphotonics.com](mailto:sales@dkphotonics.com)

<https://www.dkphotonics.com>

Add.:

4F, Bldg. 18, Qinghu Industrial Park,  
 Dahe Road, Longhua Dis.,  
 Shenzhen, China 518109

### Package Dimension

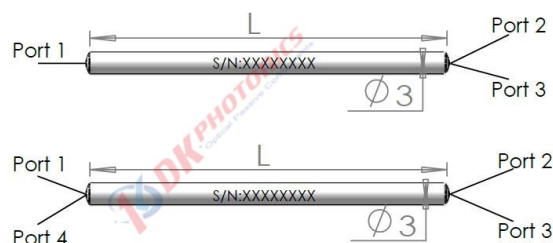

\*Due to ongoing design improvements, the package size is subject to change. Please contact DK Photonics for confirmation if you have special requirements.

## Performance Specifications

### 1030nm 1x2(2x2) PM Fiber Fused Coupler

Parameter	Unit	Values	
Configuration	-	1x2 or 2x2	
Grade	-	P A	
Center Wavelength	nm	1030,1040,1050	
Wavelength Range	nm	±20	
Excess Lose	Typ.	0.2	0.4
	Max.	0.4	0.6
Mini. PER for Through Port	dB	20	18
Min. Directivity	dB	55	50
Min. Return Loss	dB	55	50
Thermal Stability	dB/°C	≤0.005	
Max. Power Handling	W	0.5, 2, 3, 5, 10	
Max. Tensile Load	N	5	
Fiber Type	-	PM980 Panda fiber, or PM1060L fiber or other	
Operating Temperature	°C	-10 ~ +70	
Storage Temperature	°C	-40 ~ +85	
Dimensions (Φ×L)	mm	Φ3.0×54(bare fiber), or Φ3.0×60(0.9mm loose tube)	

- Above specifications are for device without connector, and the PM fused coupler is both axis working, no axis can be blocked; default test extinction ratio is on the slow axis. All parameters are tested at room temperature at central wavelength only.
- ER data listed in the table are for the ports with coupling ratio greater than 10%. It will be 2 dB lower for a tap port with coupling ratio between 5-10%. For <5% tap port, ER is not considered if there is no requirement.
- For devices with connectors, IL will be 0.3dB higher, RL will be 5dB lower and ER will be 2dB lower. Power transmits through the connector less than 2W. The default connector key is aligned to slow axis.
- Regarding the coupler handling power: <2W with connector, <5W when splicing.
- For >10W high power applications, we will use heat sink package, contact DK Photonics for details.
- If there is pulse application, please be sure to inform us of pulse energy and peak power.

## Order information P/N: PMFBTC-①-②-③-④-⑤-⑥-⑦-⑧-⑨

When you inquire, please provide the correct P/N number according to our ordering information and attach the appropriate description would be better. If need any connector, we do not recommend choosing a 250μm bare fiber pigtail.

①	②	③	④	⑤	⑥	⑦	⑧	⑨		
Grade	Port	Operating Wavelength	Power Handling	Coupling Ratio	Fiber Type	Fiber Diameter	Fiber Length	Connector		
P: P	102:1x2	30:1030nm	L:<0.5W	50:50/50	05:5/95	1: Standard	25:250μm	08:0.8m	00: None	SA: SC/APC
grade	202:2x2	40:1040nm	2:2W	40:40/60	02:2/98	PM fibers	bare fiber	10:1.0m	FP: FC/PC	LP: LC/PC
A: A		50:1050nm	5:5W	30:30/70	01:1/99	XX: Others	90:900μm	XX: Others	FA: FC/APC	LA: LC/APC
grade		XX: Others	10:10W	20:20/80	XX: Others		Loose tube		SP: SC/PC	XX: Others
				10:10/90			XX: Others			

**Part Number Example:** PMFBTC-P-202-30-1-50-1-90-10-FA

**Description:** 1030nm 2x2 PM Fiber Fused Coupler, P grade, 1W, 50:50 coupling ratio, 1.0m PM980 panda fiber with 0.9mm OD loose tube, and FC/APC connectors at all ports.

## Ordering Information for Custom Parts

If you need to customize other specifications, please provide detailed description for your requirement.