



780nm Polarization Maintaining Mechanical Variable Optical Attenuator

Key Features


- Wide attenuation range
- High precision
- Low original loss
- Compact size

780nm Polarization Maintaining Mechanical Variable Optical Attenuator is a useful tool for the optical components and systems test. All input and output fibers are polarization maintaining to maintain the polarization state of the light. The PM Manual Variable Optical Attenuator is designed and manufactured to reduce the output optical power, get the power suitable. It is with low insertion loss, high extinction ration, high return loss and low Adjustment Precision, The PM Attenuator is widely applied at fiber laser system.

Both sizes of VOA are available with a hand twist or a flat-blade screwdriver. The standard size VOA uses an aluminum alloy shell, which is lighter. The nut and the screw are of elastic structure, and the adjustment torque is generated to make the mechanism self-lock, completely eliminate the transmission gap, and the transmission process is stable and five-beat. Thereby, the optical attenuation resolution is high, and the continuity, vibration resistance and stability are better.

Applications

- Fiber communication on system test
- Optical passive component test
- Fiber laser
- Fiber amplifier
- Optics lab use

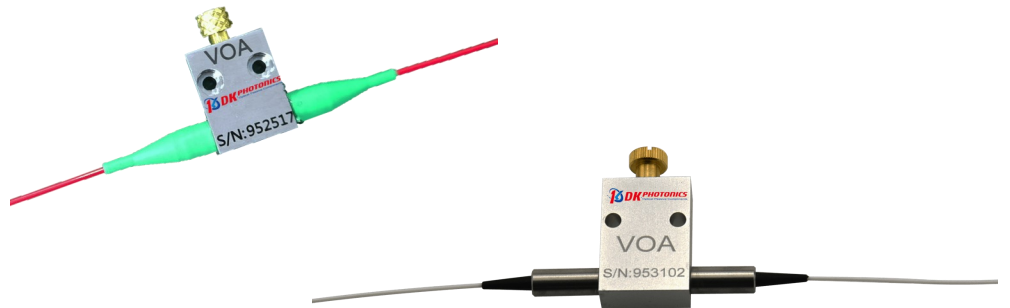

Package Dimen-

For more Info

Please contact us at:

Tel: +86-755-23736280

Fax: +86-755-26746512


E-mail: sales@dkphotonics.com

<https://www.dkphotonics.com>


Add.:

4F, Bldg. 18, Qinghu Industrial Park,
 Dahe Road, Longhua Dis.,
 Shenzhen, China 518109

Mini size:

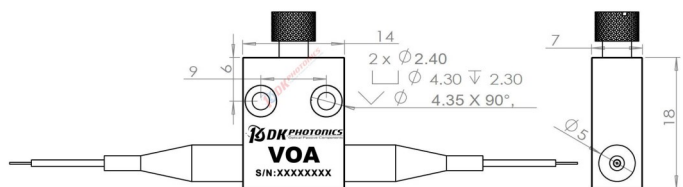

Standard size:

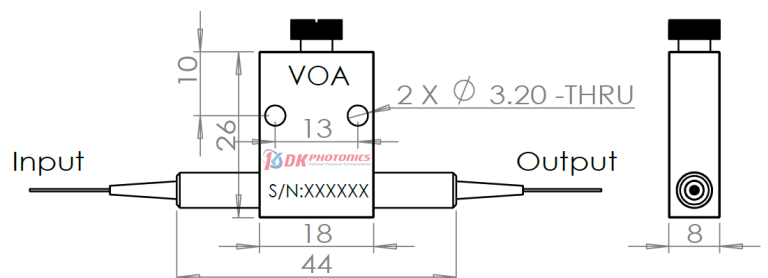

*Due to ongoing design improvements, the package size is subject to change. Please contact DK Photonics for confirmation if you have special requirements.



780nm Polarization Maintaining Mechanical Variable Optical Attenuator

Performance Specifications

| Parameter | Unit | value | |
|----------------------------|---------------|----------------------|--------------------------|
| Grade | - | P | A |
| Center Wavelength | nm | 780 | |
| Operating Wavelength Range | nm | ±50 | |
| Max. Original loss | dB | 0.6 | 1.0 |
| Attenuation range | dB | 0.6 ~ 60 | 1.0 ~ 40 |
| Min. Return loss | dB | 50 | |
| Adjustment Precision | dB | 0.02 | |
| Min. Extinction ratio | dB | 18 | |
| Max. Power Handling | mW | 500 | |
| Max. Tensile Load | N | 5 | |
| Fiber type | - | PM780-HP Panda fiber | |
| Operating temperature | °C | 0 ~ +70 | |
| Operating temperature | °C | -40 ~ +85 | |
| Dimensions | Mini size | mm | 18×14×7, stainless steel |
| | Standard size | mm | 26×18×8, aluminum alloy |

1. Above specifications are for device without connector, and the PM VOA device is both axis working. All parameters are tested at room temperature.

2. For devices with connectors, IL will be 0.5dB higher, RL will be 5dB lower and ER will be 2dB lower. The default connector key is aligned to slow axis.

Order information P/N: PMVOA-①-②-③-④-⑤-⑥-⑦

When you inquire, please provide the correct P/N number according to our ordering information, and attach the appropriate description would be better.

| ① | ② | ③ | ④ | ⑤ | ⑥ | ⑦ |
|------------------------|------------------------|-----------------------------|--------------------------------|----------------------------------|----------------------------------|---|
| Wavelength | Grade | Dimensions | Fiber Type | Pigtails Diameter | Fiber Length | Connector |
| 78:780nm XX: Others | P:P Grade A:A Grade | S: Standard M: Mini size | P78:PM780-HP XX: fiber code | 90:900µm 20:2.0mm 30:3.0mm | 08:0.8m 10:1.0m XX: Others | 00: None FP: FC/PC FA: FC/APC XX: Others |

Part Number Example: PMVOA-78-P-S-P78-90-10-FA

Description: 780nm Polarization Maintaining Mechanical Variable Optical Attenuator, P grade, Standard size, 1.0m PM780-HP Panda Fiber with 0.9mm OD loose tube, and FC/APC connectors at all ports.

Ordering Information for Custom Parts

If you need to customize other specifications, please provide detailed description for your requirement.