



Key Features

- Low Insertion Loss
- High Power Handling
- High Isolation
- PM and Non-PM are available
- Fiber can be customized
- High Reliability
- Excellent Temperature Stability


Applications

- Fiber optic Amplifiers
- Pump Laser Source
- Fiber optic Sensor
- Test and Measurement
- Instrumentation

1030nm TGG Based PM Optical Circulator

The TGG Based PM Optical Circulator is a high-performance light-wave component that routes incoming signals from Port 1 to Port 2, and incoming Port 2 signals to Port 3. They're characterized with low insertion loss, high isolation, high PER, high power handling, high return loss, excellent environmental stability and reliability. They are ideal for fiber laser and instrumentation applications.

If you do not see a standard circulator that meets your needs, we welcome the opportunity to review your desired specification and quote a custom circulator. Requests for custom fiber pigtails, different wavelengths and handling power of operation or other specific needs will be readily addressed.

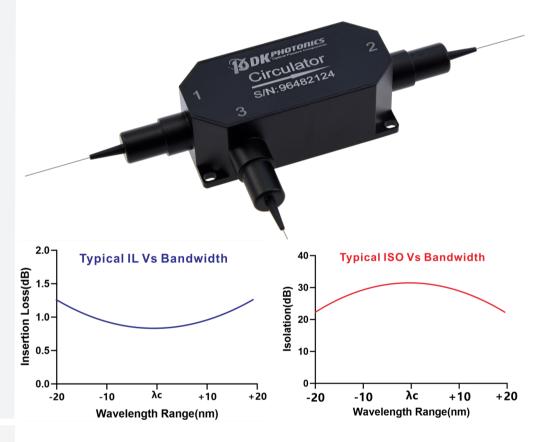

For more Info

Please contact us at:

Tel: +86-755-23736280

Fax: +86-755-26746512


E-mail: sales@dkphotonics.com

https://www.dkphotonics.com

Add.:

4F, Bldg. 18, Qinghu Industrial Park, Dahe Road, Longhua Dis., Shenzhen, China 518109

Package Dimension:

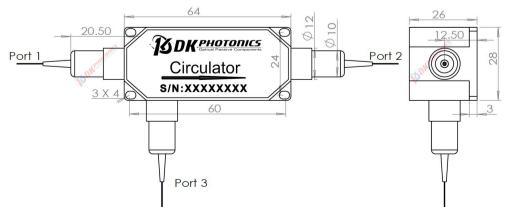

*Due to ongoing design improvements, the package size is subject to change. Please contact DK Photonics for confirmation if you have special requirements.





Polarization Maintaining Components

1030nm TGG Based PM Optical Circulator

Performance Specifications

| Parameters | Unit | Values | |
|-------------------------------------|------|--|--|
| Operation Wavelength | nm | 1030,1040 | |
| Operating Wavelength Range | nm | ±10 | |
| Typ. Peak Isolation | dB | 30 | |
| Min. Isolation, λc, 23 °C | dB | 25 | |
| Typ. Insertion Loss, 23 °C | dB | 1.0 | |
| Max. Insertion Loss, 23 °C | dB | 1.4 | |
| Min. Extinction Ratio(for PM fiber) | dB | 18(Type B), 20(Type F) | |
| Min. Cross Talk | dB | 45 (Typ. 50) | |
| Min. Return Loss | dB | 45 | |
| Power Handling(total pass) | W | 0.5,3,5,10,20 | |
| Max. Peak Power for ns Pulse | kW | 10, 20 (for typical pulse application) | |
| Max. Tensile Load | Ν | 5 | |
| Fiber Type | - | PM980-XP fiber, PM1060L, PM10/125DC, PM20/130DC, PM25/250DC, or other | |
| Operating Temperature | °C | 0 ~ +60 | |
| Storage Temperature | °C | -10 ~ +75 | |

1. Above specification are for device without connector, and may change without notice.

2. IL is 0.3 dB higher and RL is 5 dB lower, ER is 2dB lower (PM type) for each connector added.

3. The pass optical power is 2 W only for connector added, higher power requires splicing fibers.

4. Type B: Both axis working, Type F: Fast axis blocked, the default is Type B if without request (Only for PM type)

5. If there is pulse application, please be sure to inform us of pulse energy and peak power.

Order information P/N: PMOC-B/F-(1-(2)-(3)-(4)-(5)-(6)-(7)(B: Both axis working, F:Fast axis blocked)

When you inquire, please provide the correct P/N number according to our ordering information and attach the appropriate description would be better. If need any connector, we do not recommend choosing a 250µm bare fiber pigtail. For high power applications, we recommend direct splicing without connectors.

| 1 | 2 | 3 | 4 | 6 | 6 | \bigcirc |
|----------|-------------------------|---|----------------------------------|---|---|--|
| Port | Operating Wavelength | Power Handling | Fiber Type | Fiber Diameter | Fiber Length | Connector |
| 3:3-port | 30:1030nm XX: Others | L:<0.5W 1:1W 3:3W 5:5W 10:10W | P98X: PM980-XP XX: fiber name | 25:250μm bare fiber 90:900μm Loose Fiber XX: Others | 05:0.5m 10:1.0m 15:1.5m XX: Others | 00: None FP: FC/PC FA: FC/APC LP: LC/PC LA: LC/APC XX: Others |

Part Number Example: PMOC-F-3-30-L-P98X-90-10-FA

Description: 1030nm 3-port Polarization Maintaining Optical Circulator, fast axis blocked, 0.5W power handling, PM980-XP fiber, with 0.9mm OD loose tube, 1.0m length fiber pigtails, FC/APC connectors.

Ordering Information for Custom Parts

If you need to customize other specifications, please provide detailed description for your requirement.